




DC-100P

Battery Light  
IP65

- Seven colors can be flexibly adjusted, present rainbow water effect
- Smooth dimming
- DMX512, RDM, data bidirectional protocol
- Widely used for Cultural tourism market, theme park, Characteristic town, etc

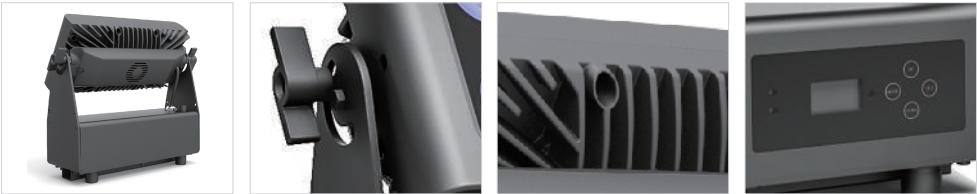


Housing color




DC-100P Parameter

|                  |                                                                                        |                               |                                                                   |
|------------------|----------------------------------------------------------------------------------------|-------------------------------|-------------------------------------------------------------------|
| LED Qty          | 8*15W 4 in 1 RGBW                                                                      | Dimensions                    | 369x126x303mm                                                     |
| Lumen            | 566lm                                                                                  | N.W.                          | 9Kg                                                               |
| Beam angle       | 4.5°、8°、20°                                                                            | Housing material              | Die-cast aluminium + Environmental Protection Flame Retardant ABS |
| Input voltage    | AC110~240V,50-60Hz                                                                     | Housing color                 | Black                                                             |
| Power            | 72W                                                                                    | Power cable                   | input/output Xi Shang waterproof power socket                     |
| Drive current    | 50mA                                                                                   | DMX cable                     | Seetronic 5pins waterproof DMX input/output                       |
| Dimming          | 16Bit                                                                                  | Electrical safety class       | I                                                                 |
| Cooling          | Natural convection cooling                                                             | EMC                           | EMC、EMI                                                           |
| Control protocol | DMX512、 Wireless DMX                                                                   | Permitted Ambient Temperature | -20℃~45℃                                                          |
| DMX channel      | 4CH、 6CH、 10CH                                                                         | IP Grade                      | IP65                                                              |
| Function         | Auto Run program,Auto Run effect,upgrade online,power management, change angle quickly |                               |                                                                   |


DC-100P Optical Parameters

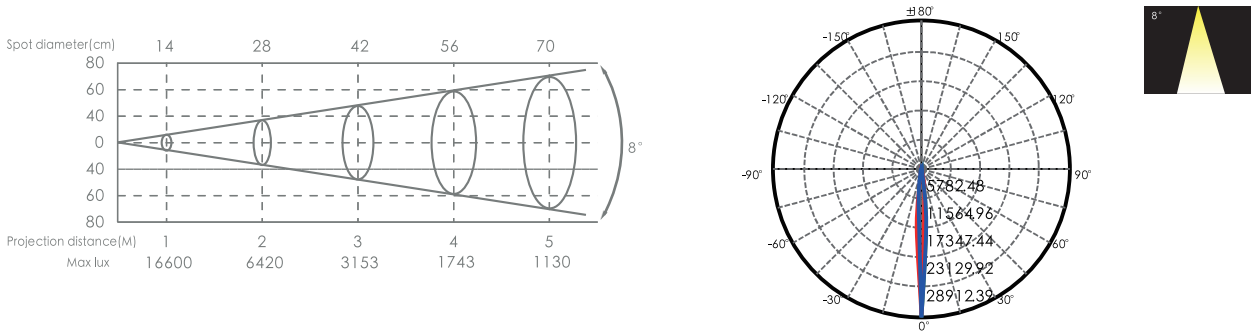

DC-100P Specifications

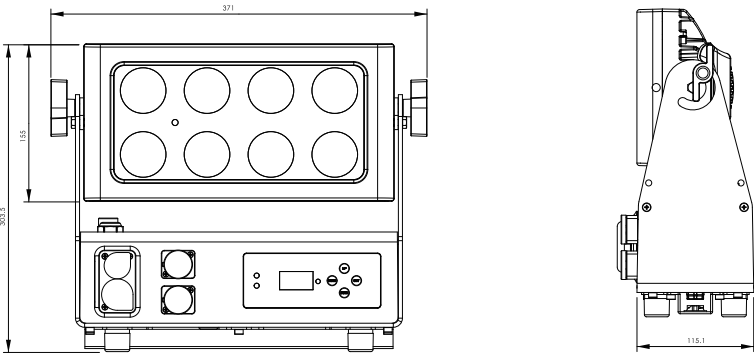

DC-100P Installation Instruction

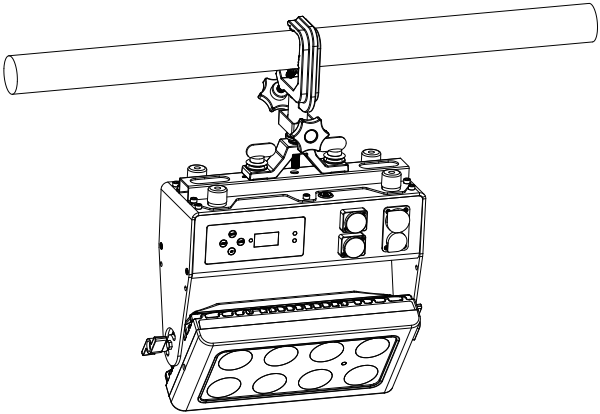

DC-100P Optional accessories

