



FX-200P

Two-way blinder
IP65

- A professional light weight two-way blinder for indoor and outdoor use
- 1800k-5000k color temperature adjustable, at the same time, it can present RGB backlight effect
- 16bit dimming way
- DMX512 protocol and RDM function
- This fixture can be widely used in stage performance, live show, TV station and other places





Housing color





FX-200P Parameter

| | | | |
|------------------|-------------------------------------|-------------------------------|--|
| LED | 2x90W customized 2 in 1 LEDs A/WW | Function | Auto Run program, Auto Run effect, RGB backlight |
| CCT | Amber:1800k Warm white:3000k | Dimensions | 398x217x323mm |
| Lumen | 10183lm | N.W. | 7.3Kg |
| Beam angle | 40° | Housing material | Die casting Magnesium+Aluminum Plate |
| Input voltage | AC100~240V, 50-60Hz | Housing color | Black |
| Power | 195W | Power cable | Input/output Seetronic waterproof power socket |
| Drive current | 2.8A | DMX cable | Input/output Seetronic waterproof signal socket |
| Dimming | 16Bit | Electrical safety class | I |
| Cooling | Die casting Magnesium + Fan cooling | EMC | EMC, EMI |
| Control protocol | DMX512(RDM) | Permitted Ambient Temperature | -20°C~45°C |
| DMX channel | 5CH、7CH、10CH、13CH、17CH | IP Grade | IP65 |

FX-200P Optical Parameters

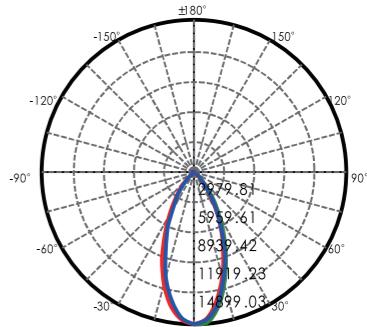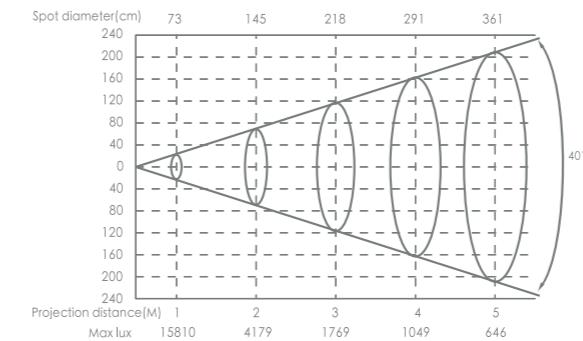

FX-200P Specifications

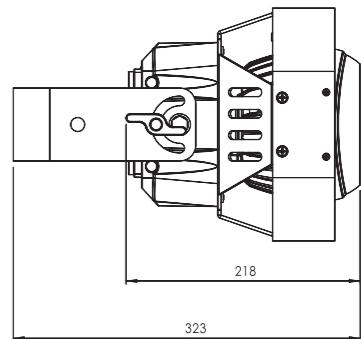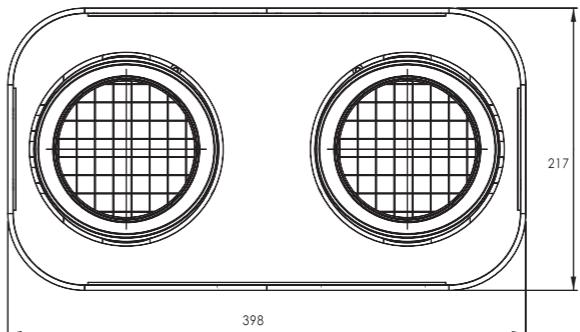

FX-200P Installation Instruction

