




SW-305P
Imager HD 100

- Each images can achieved ripple effect
- Very smooth Dimming gray transformation
- Gobo can be switched flexibly, accurate rotation and positioning
- Support DMX512 and RDM bidirectional protocol
- Professional for cuturel tourism market,commercial streets,theme parks, theme towns, theme restaurants,museums etc.




Housing color can be customized




SW-305P Parameter

Light source	100W white LED	Color	Red, Green, Blue, Yellow, light blue, Magenta, Orange
CCT	9359K	Dimension	398*273*165MM
Lumen	2170 lm	N.W.	9.36KG
Beam angle	15°~ 30°	Housing material	Magnesium-aluminium alloy
Input voltage	100-240V AC,50-60Hz	Housing color	Grey
Power	121W	Power cable	Power in/out (3-pin rubber cable)
Drive current	6A	Data cable	DMX in/out (3-pin rubber cable)
Dimming	0-100%	Electrical safety class	I
Cooling	Convection + Fan cooling	EMC	EMC,EMI
Control protocol	DMX512,RDM	Permitted Ambient temperature	-20 ~ +45℃
DMX channel	13CH	IP Grade	IP65
Function	Auto run,Built in,Master/Slave,DMX,RDM	Rotating wheel	Rotated gobo wheel 7+1
Fixed wheel	Fluttering images wheel		

SW-305P Optical Parameters

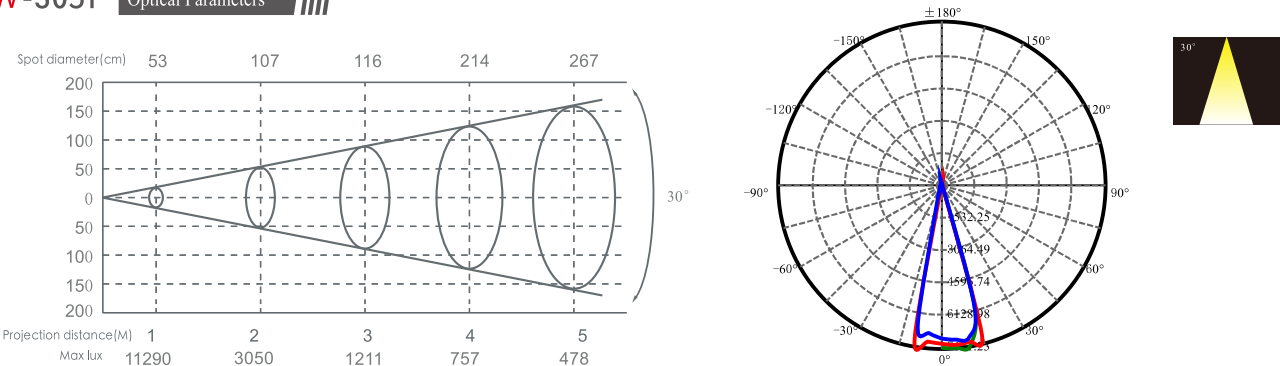

SW-305P Specifications

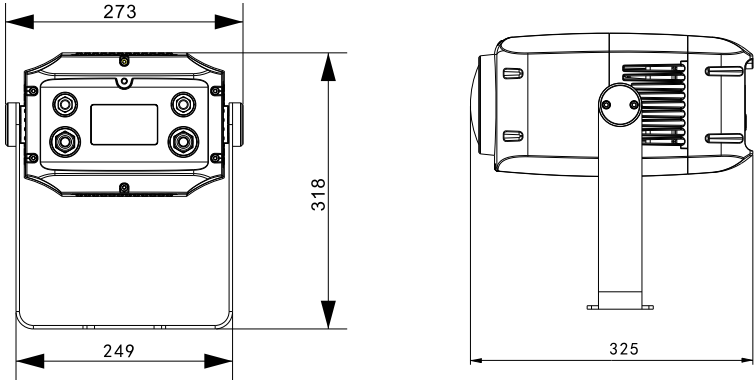

SW-305P Installation Instruction

