



IXT18C

A professional LED Linear Light

- We have the length of 1m, 0.5m, 0.3m optional for project use
- The fixture is configured superior optical system. It also have rich angles for different application.
- DMX512 protocol and RDM function
- Color change is natural, with better color mixing, meanwhile, it also have single white LED type opprotidoun.
- This fixture can be widely used in theme park, t heme town, high buildings, live show , bridge, pier, high tower lighting and other places




Housing color can be customized




IXT18C Parameter

Item Number	IXT18C20(1000mm)	IXT18C02(1000mm)	IXT18C04(1000mm)	IXT18C38(1000mm)
		IXT18C21(500mm)	IXT18C36(500mm)	IXT18C34(500mm)
	IXT87C22(300mm)	IXT87C37(300mm)	IXT87C35(300mm)	IXT87C33(300mm)
LED Qty	48 pcs(1000mm)/24 pcs(500mm)/12 pcs(300mm)			
Beam Angle	110°			
Spot Angle	160°			
Lumen	755lm/460lm/220lm		410lm/200lm/150lm	440lm/215lm/160lm
CRI	Ra≥70			
Color Tempreture	1800K~6000K optional		RGB	RGBW(W:3000/4000/6000K optional)
Product Measurement	1000x45x46mm(1000mm)/500x45x46mm(500mm)/300x45x46mm(300mm)			
N.W.	0.8kg(1000mm)/0.5kg(500mm)/0.3kg(300mm)			
Input Voltage Range	DC24V			
Watts	12W(1000mm)/6W(500mm)/3W(300mm)			
Power Factor	> 0.9			
Housing Material	Tensile Aluminum			
Color	Matt black / Grey			
Cooling	Natural convection cooling			
Control Protocol	ON/OFF	DMX512	DMX512	DMX512
Segmented Control	8 Section(1000mm)/4 Section(500mm)/2 Section(300mm)			
Channel	/			
Power /Installation	Independent			
Conection	2pin rubber cable:input/output	black rubber cable 5 Pin In & Out		
Power Linking	8pcs(1000mm)/16pcs(500mm)/32pcs(300mm)			
DMX Linking	16pcs(1000mm)/32pcs(500mm)/64pcs(300mm)			
Certification	CE、RoHS			
IP Grade	IP65			

IXT18C Optical Parameters

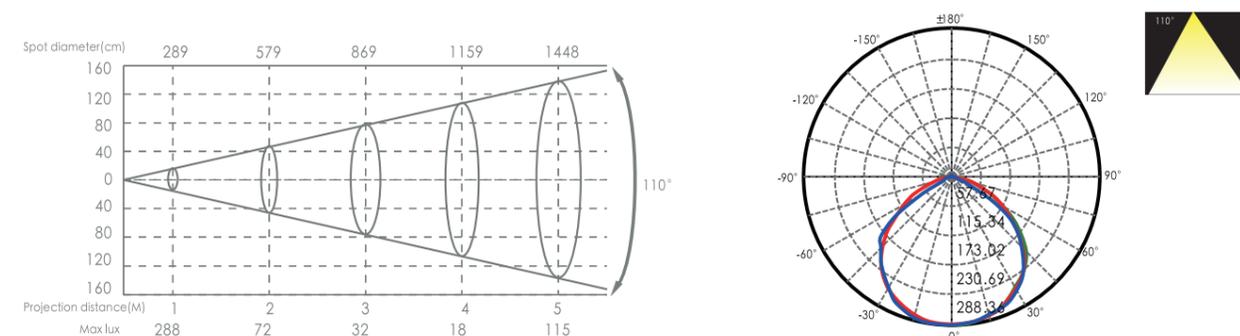

IXT18C Specifications

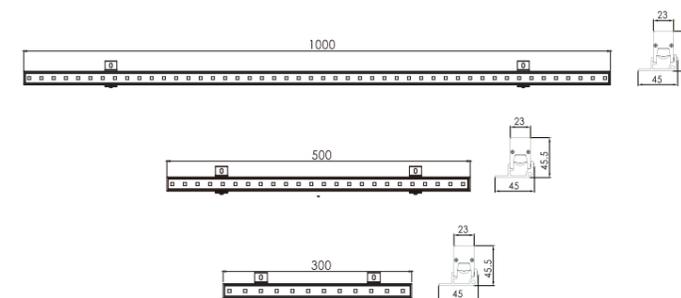

IXT18C Installation Instruction

