



## IXQ17C

A professional LED wall Washer

- We have the length of 1m, 0.5m, 0.3m optional for project use
- Color change is natural, with better color mixing
- The fixture has configured superior optical system. It also have rich angles for different application
- DMX512 protocol and RDM function
- This fixture can be widely used in theme park, theme town, high buildings, live show, bridge, pier, high tower lighting and other places




Housing color can be customized




## IXQ17C Parameter

Item Number	IXQ17C31(1000mm)	IXQ17C16(1000mm)	IXQ17C17(1000mm)	IXQ17C20(1000mm)	IXQ17C47(1000mm)
	IXQ17C39(500mm)	IXQ17C34(500mm)	IXQ17C35(500mm)	IXQ17C36(500mm)	
	IXQ17C40(300mm)	IXQ17C33(300mm)	IXQ17C38(300mm)	IXQ17C29(300mm)	
LED Qty	24 pcs(1000mm)/12 pcs(500mm)/6 pcs(300mm)				16pcs(1000mm)
Beam Angle	20° /30° /40° / 20°x40° optional				
Spot Angle	40° /50° /75° / 45°x75° optional				
Lumen	2260lm/1116lm/710lm		1050lm/650lm/318lm	1240lm/610lm/430lm	1240lm
CRI	Ra≥70				
Color Tempreture	1800K~6000K optional		RGB	RGBW(W:3000/4000/6000K optional)	
Product Measurement	1000x47x63mm(1000mm)/500x47x63mm(500mm)/300x47x63mm(300mm)				
N.W.	1.9kg(1000mm)/1.2kg(500mm)/0.8kg(300mm)				
Input Voltage Range	DC24V				
Watts	36W(1000mm)/18W(500mm)/9W(300mm)				
Power Factor	>0.9				
Housing Material	Tensile Aluminum+die-cast aluminium				
Color	Matt black / Grey				
Cooling	Natural convection cooling				
Control Protocol	ON/OFF	DMX512	DMX512	DMX512	DMX512-RDM
Segmented Control	4 Section(1000mm)/2 Section(500mm)/1 Section(300mm)				4 Section(1000mm)
Channel					4/6/7/16
Power /Installation	Independent				
Conection	2pin rubber cable:input/output	black rubber cable 5 Pin In & Out			
Power Linking	5 pcs(1000mm)/8 pcs(500mm)/12 pcs(300mm)				
DMX Linking	32/64/128				
Certification	CE·RoHS				
IP Grade	IP65 IP65				

## IXQ17C Optical Parameters

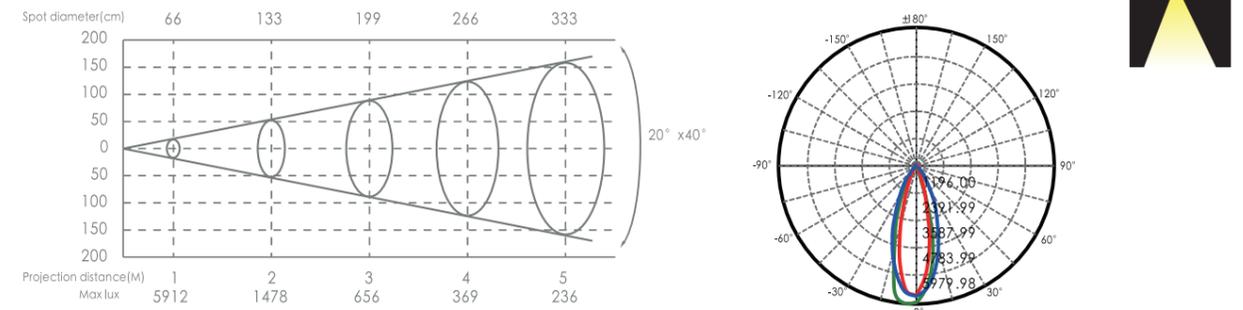

## IXQ17C Specifications

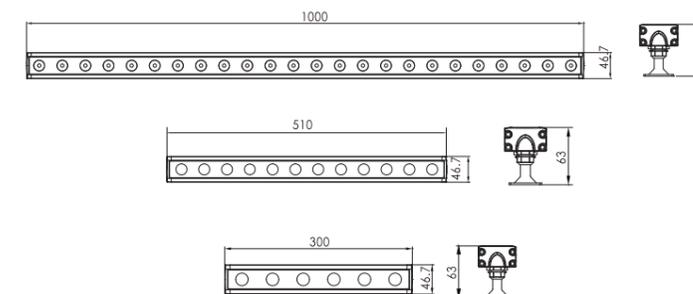

## IXQ17C Installation Instruction

