



### IXQ17D

A professional LED wall Washer

- We have the length of 1m, 0.5m, 0.3m optional for project use
- The fixture has configured superior optical system. It also have rich angles for different application
- Color change is natural, with better color mixing
- DMX512 protocol and RDM function
- This fixture can be widely used in theme park, theme town, high buildings, live show, bridge, pier, high tower lighting and other places.



Housing color can be customized




### IXQ17D


Parameter

Item Number	IXQ17D22(1000mm)	IXQ17D24(1000mm)	IXQ17D26(1000mm)	IXQ17D28(1000mm)	IXQ17D43(1000mm)
	IXQ17D30(500mm)	IXQ17D32(500mm)	IXQ17D34(500mm)	IXQ17D36(500mm)	
	IXQ17D38(300mm)	IXQ17D39(300mm)	IXQ17D40(300mm)	IXQ17D41(300mm)	
LED	24 pcs(1000mm)/12 pcs(500mm)/6 pcs(300mm)				16 pcs(1000mm)
Beam Angle	20° /30° /40° /20° x40° optional				
Spot Angle	40° /50° /75° /45° x75° optional				
Lumen	3750lm/1860lm/815lm		1395lm/865lm/450lm	1835lm/1085lm/550lm	2036lm
CRI	Ra≥70				
Color	1800k~6000k optional		RGB	RGBW(W:3000/4000/6000K optional)	
Dimensions	1000x52x101mm(1000mm)/510x52x101mm(500mm)/300x52x101mm(300mm)				
N.W.	3kg(1000mm)/1.7kg(500mm)/1.2kg(300mm)				
Input Voltage	AC220V				
Power	60W(1000mm)/30W(500mm)/18W(300mm)				
Power Factor	>0.9				
Housing Material	Tensile Aluminum+die-cast aluminium				
Housing Color	Matt black / Grey				
Cooling	Natural convection cooling				
Control Protocol	ON/OFF	DMX512	DMX512	DMX512	DMX512、RDM
Segmented Control	4 Section(1000mm)/2 Section(500mm)/1 Section(300mm)				4 Section(1000mm)
Channel	/				4/6/7/16
Power /Installation	Build-in integration				
Connection	3pin rubber cable:input/output	Power: Black rubber cable 3Pin In & Out; DMX: Black rubber cable 4Pin In & Out			
Power Linking	14 pcs(1000mm)/28 pcs(500mm)/56 pcs(300mm)				
DMX Linking	32 pcs(1000mm)/64 pcs(500mm)/128 pcs(300mm)				
Certification	CE、RoHS				
IP Grade	IP65				

### IXQ17D Optical Parameters

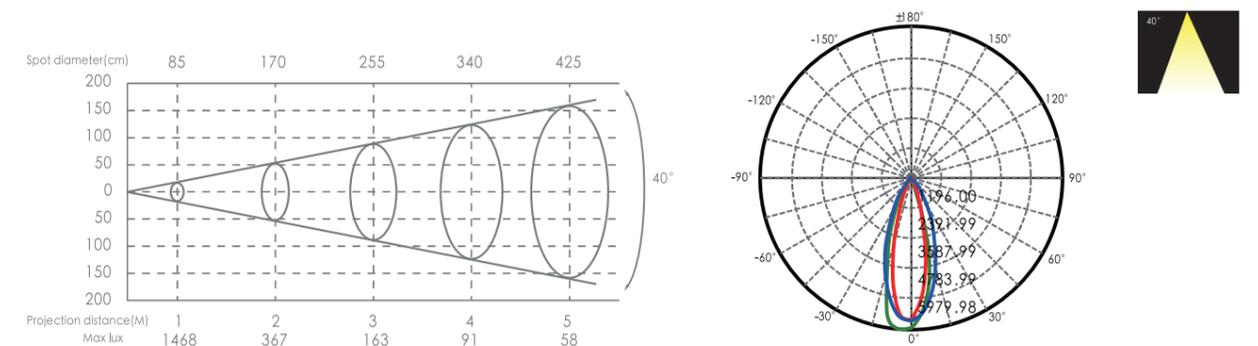

### IXQ17D Specifications

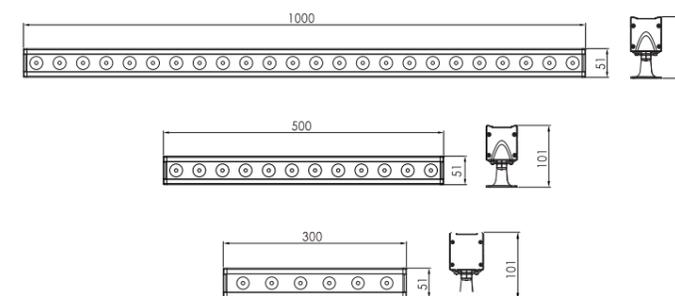

### IXQ17D Installation Instruction

