



IXQ18B

A professional LED wall Washer

- We have the length of 1m, 0.5m, 0.3m optional for project use.
- The fixture has configured superior optical system. It also have rich angles for different application
- Color change is natural, with better color mixing, meanwhile, it also have single white light LED type options
- DMX512 protocol and RDM function
- This fixture can be widely used in theme park, theme town, high buildings, live show, bridge, pier, high tower lighting and other places.



Housing color can be customized




IXQ18B


Parameter

Item Number	IXQ18B01(1000mm)	IXQ18B03(1000mm)	IXQ18B05(1000mm)	IXQ18B07(1000mm)	IXQ18B17(1000mm)
	IXQ18B09(500mm)	IXQ18B11(500mm)	IXQ18B13(500mm)	IXQ18B15(500mm)	
LED Qty	24 pcs(1000mm)/12 pcs(500mm)/6 pcs(300mm)				16 pcs(1000mm)
Beam Angle	20° /30° /40° /20° x40°/60° optional				
Spot Angle	40° /50° /75° /45° x75°/100° optional				
Lumen	3750lm/1860lm/815lm		1395lm/865lm/450lm	1835lm/1085lm/550lm	1652lm
CRI	Ra≥70				
Color Tempreture	1800K ~6000K optional		RGB	RGBW(W:3000/4000/6000K optional)	
Product Measurement	1000x52x80mm(1000mm)/510x52x80mm(500mm)/300x52x80mm(300mm)				
N.W.	2.5kg(1000mm)/1.6kg(500mm)/1.2kg(300mm)				
Input Voltage Range	DC24V				
Watts	48W(1000mm)/24W(500mm)/12W(300mm)				
Power Factor	> 0.9				
Housing Material	Tensile Aluminum+die-cast aluminium				
Color	Matt black / Grey				
Cooling	Natural convection cooling				
Control Protocol	ON/OFF	DMX512	DMX512	DMX512	DMX512、RDM
Segmented Control	4 Section(1000mm)/2 Section(500mm)/1 Section(300mm)				4 Section(1000mm)
Channel					4/6/7/16
Power / Installation	Independent				
Conection	2pin rubber cable:input/output		black rubber cable 5 Pin In & Out		
Power Linking	3 pcs(1000mm)/6 pcs(500mm)/12 pcs(300mm)				
DMX Linking	32 pcs(1000mm)/64 pcs(500mm)/128 pcs(300mm)				
Certification	CE、RoHS				
IP Grade	IP65				

IXQ18B Optical Parameters

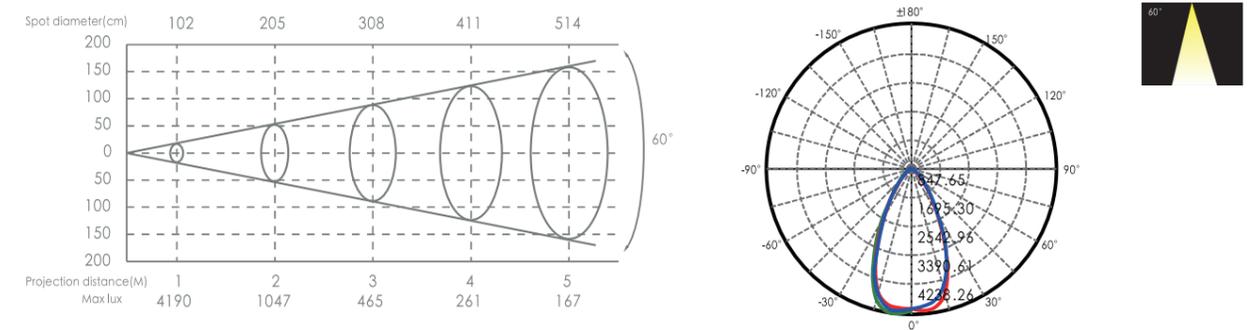

IXQ18B Specifications

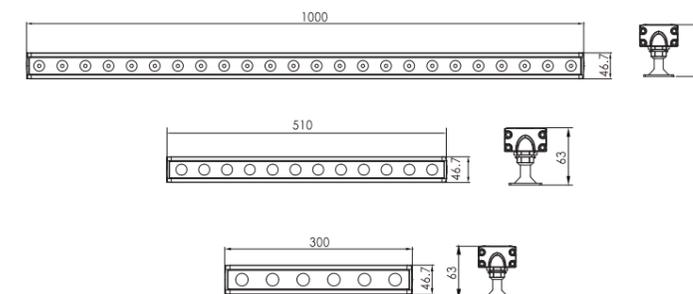

IXQ18B Installation Instruction

