



CT-001P-0.5M

A professional 0.5M LED BAR for indoor and outdoor use

- Color change is natural, with better color mixing
- Pixel independently control RGBW which can present the rainbow and flowing water effect
- Standard DM X512 protocol and RDM, data two-way feed back protocol
- This fixture can be specialized in rental company, studio, auditorium, bar, and other places, widely used in the footlight of stage performance, rim light of stage




Housing color




CT-001P-0.5M Parameter

LED Qty	7*15W 4 in 1 RGBW	Function	segmented independent control, Auto Run program, Auto Run effect, change the different angle rapidly
CCT	6500K	Dimensions	511x150x237mm
Lumen	1265lm	N.W.	6.2Kg
Beam angle	4.5°, 8°, 20°	Housing material	Die -cast Magnesium alloy+Tensile Aluminum+Environmental Protection Flame Retardant ABS
Input voltage	AC100~240V, 50-60Hz	Housing color	Black
Power	100W	Power cable	input/output Xi Shang waterproof power socket
Drive current	1A	DMX cable	input/output Xi Shang waterproof signal socket
Dimming	16Bit	Electrical safety class	I
Cooling	Natural convection cooling	EMC	EMC、EMI
Control protocol	DMX512	Permitted Ambient Temperature	-20°C~45°C
DMX channel	4CH、6CH、8CH、38CH	IP Grade	IP65


CT-001P-0.5M Optical Parameters

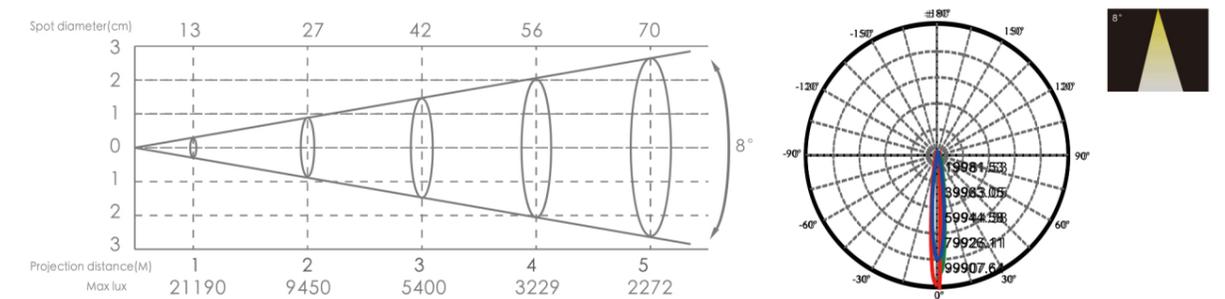


CT-001P-0.5M Specifications

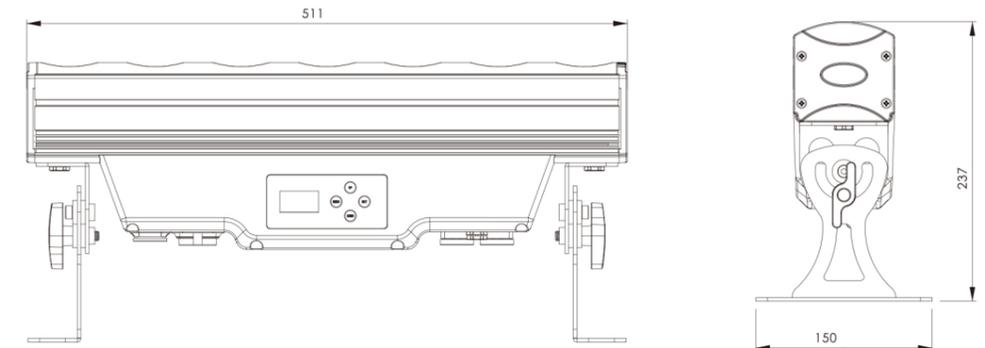

CT-001P-0.5M Installation Instruction

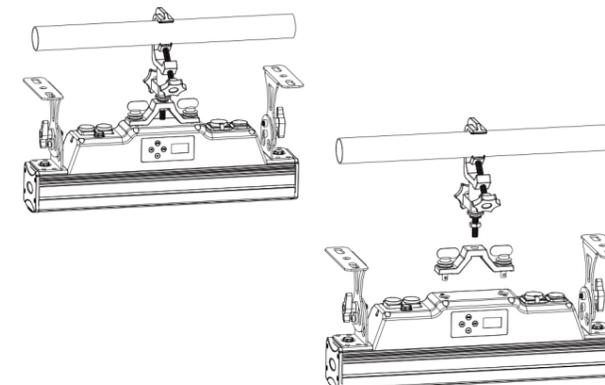

CT-001P-0.5M Optional accessories



Diffuser 15° 20° 30° 40° 15x60° optional