



MYLED-101

Seven colors can be flexibly adjusted, present rainbow water effect

- Smooth dimming
- DMX512, RDM, data bidirectional protocol
- Widely used for Cultural tourism market, theme park, Characteristic town, etc




Housing color can be customized




MYLED-101 Parameter

Item Number	MYLED-101	MYLED-101H	MYLED-102A	MYLED-103A
LED Qty	18 pcs			9 pcs
Beam Angle	15° /25° optional			
Spot Angle	25° /45° optional			
Lumen	3258lm	3558lm	2890lm	1586lm
CRI				
Color Tempreture	RGBW(W:6000K)			
Product Measurement	1027*170*222mm			527*140*222mm
N.W.	8.5kg			4.2kg
Input Voltage Range	AC220V			
Watts	120W	105W	190W	54W
Power Factor	>0.9			
Housing Material	Tensile Aluminum+die-cast aluminium			
Color	Matt black / Grey			
Cooling	Natural convection cooling			
Control Protocol	DMX512			
Segmented Control	6 Section	1 Section	Control	3 Section
Channel	3/6/24	4/6/8	2/6/72	4/6/8
Power /Installation	Build-in integration			
Conection	Power line:3pin rubber cable:input/output Signal line:2pin rubber cable:input/output			
Power Linking	7 pcs			20 pcs
DMX Linking	20 pcs	128 pcs	7 pcs	40 pcs
Certification	CE, RoHS			
IP Grade	IP67			

MYLED-101 Optical Parameters

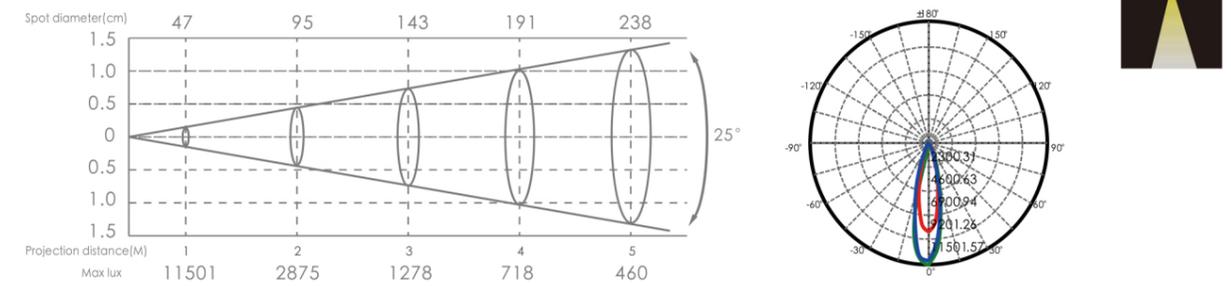

MYLED-101 Specifications

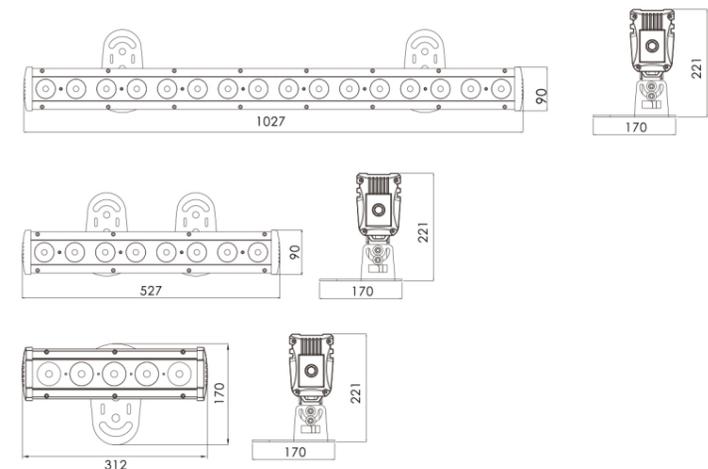

MYLED-101 Installation Instruction

